


Medical Scroll Enclosure System Dimensions (in)

Model	A	A1	B	B1	C	D	D1	E	E1	F	Inlet	Outlet
MSEQ150	37.5	46.4	29.4	31.5	61.2	83.0	87.0	32.0	40.4	96.2	1 ½	1 ½
MSEQ200	37.5	46.4	29.4	31.5	61.2	83.0	84.5	32.0	39.4	96.2	1 ½	2

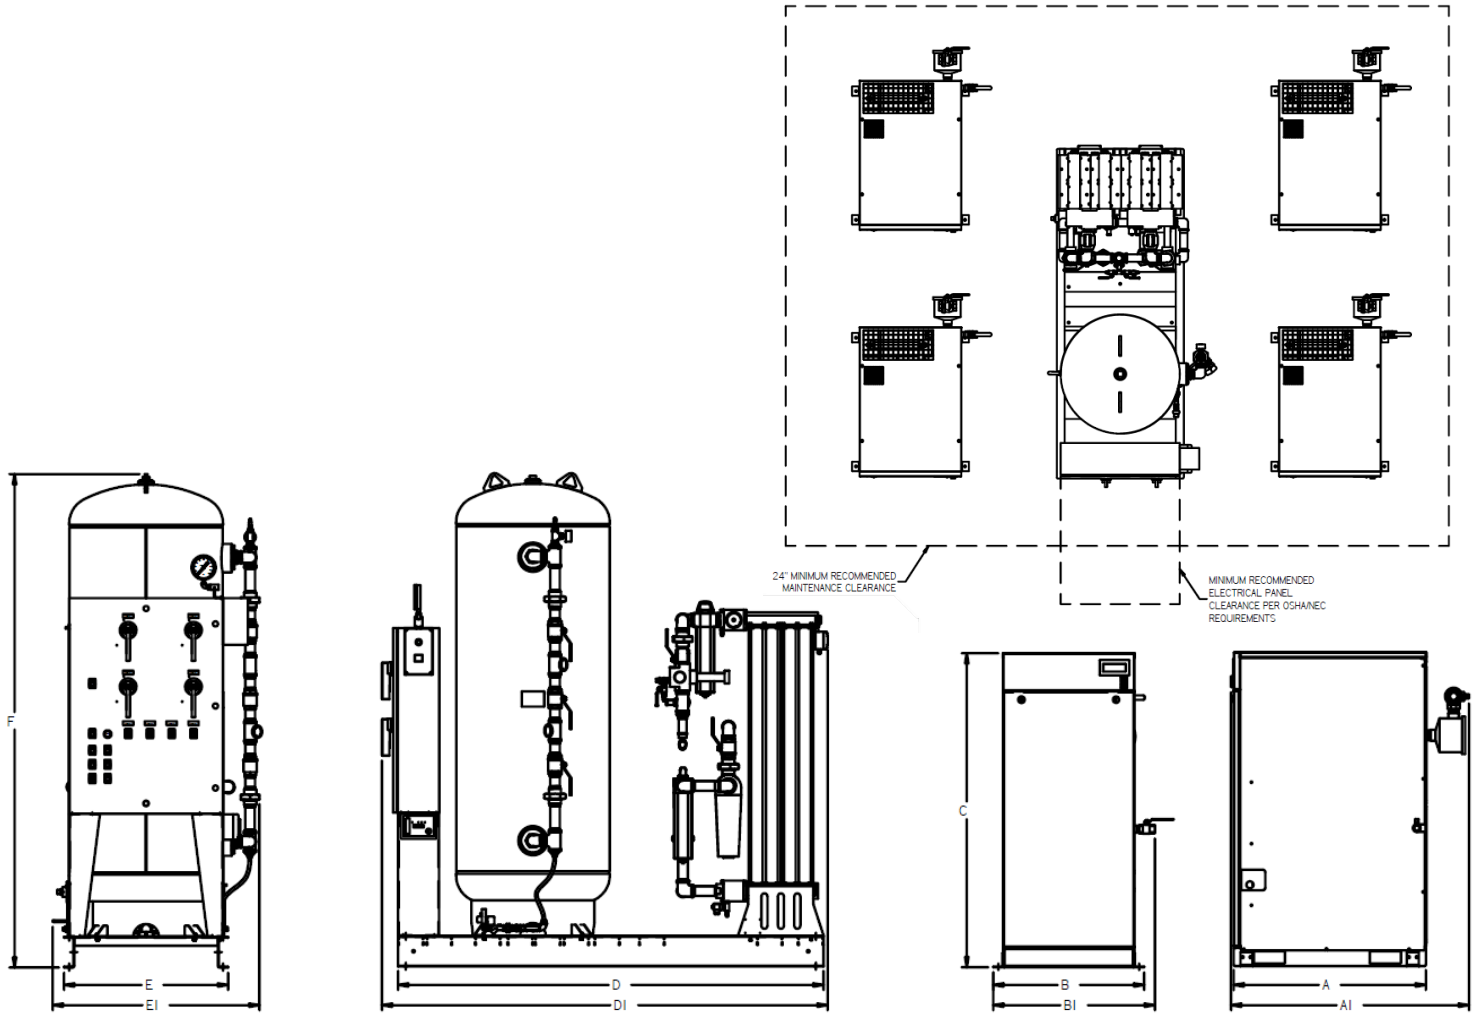

Medical Scroll Enclosure System Specifications

Model	HP <sup>(1)</sup>	SCFM @ 100 PSIG <sup>(3)</sup>	SCFM @ 50 PSIG <sup>(3)</sup>	Tank (gal)	BTU/Hr <sup>(2)</sup>	dB(A) Level <sup>(4)</sup>	System F.L.A.			Weight (lbs)
							208V	230V	460V	
MSEQ150	45	136.8	149.4	240	114,615	61	174.8	158	79.9	5911
MSEQ200	60	182.4	199.2	240	152,820	63	232.4	210	105.8	6538

- Notes:
- 1 – HP is shown with one or more compressors in reserve per NFPA 99.
  - 2 – BTU/Hr levels are shown with reserve compressor(s) on standby.
  - 3 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing medical air systems
  - 4 – dB(A) levels are shown with one compressor in reserve.
  - 5 – Minimum recommended clearance 24" around system; follow OSHA/NEC requirements at control panel.
  - 6 – 3 Year Limited Warranty.