


Medical Scroll Enclosure System Dimensions (in)

Model	A	A1	B	B1	C	C1	D	D1	E	E1	F	Inlet	Outlet
MSEQ300	38.4	38.9	58.2	61.8	61.6	68.3	55.0	63.4	31.5	35.6	79.4	1 ½	2
MSEQ400	38.4	38.9	58.2	61.8	61.6	68.3	55.0	65.4	31.5	36.7	83.7	1 ½	2 ½

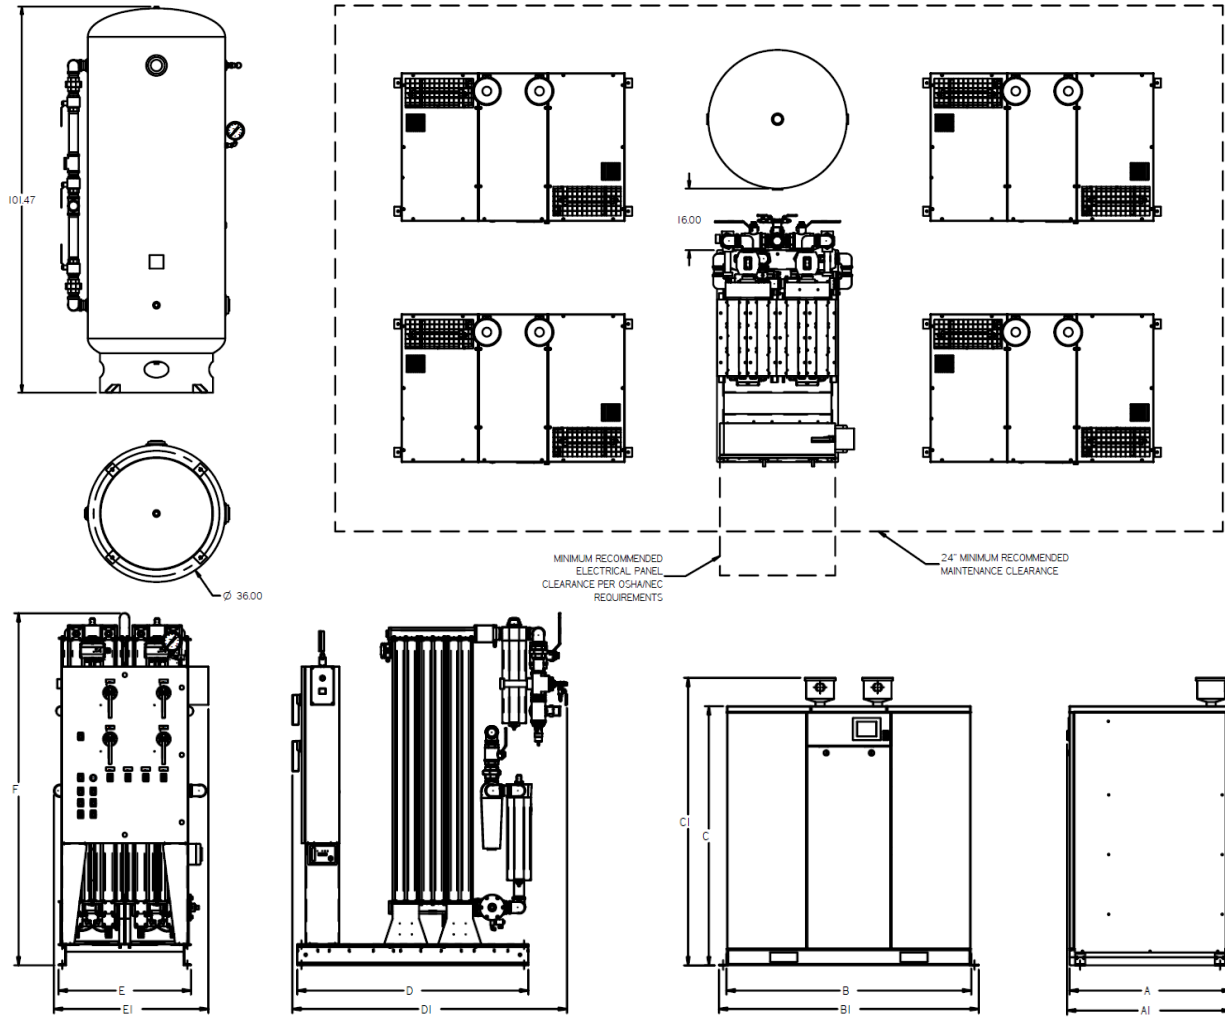

Medical Scroll Enclosure System Specifications

Model	HP ⁽¹⁾	SCFM @ 100 PSIG ⁽³⁾	SCFM @ 50 PSIG ⁽³⁾	Tank (gal)	BTU/Hr ⁽²⁾	dB(A) Level ⁽⁴⁾	System F.L.A.			Weight (lbs)
							208V	230V	460V	
MSEQ300	90	274.5	298.8	400	229,230	64	347.6	314	157.8	8888
MSEQ400	120	366	398.4	400	305,640	65	462.8	418	209.7	10545

Notes:

- 1 – HP is shown with one or more compressors in reserve per NFPA 99.
- 2 – BTU/Hr levels are shown with reserve compressor(s) on standby.
- 3 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing medical air systems
- 4 – dB(A) levels are shown with one compressor in reserve.
- 5 – Minimum recommended clearance 24" around system; follow OSHA/NEC requirements at control panel.
- 6 – 3 Year Limited Warranty.