


Medical Scroll Enclosure System Dimensions (in)

Model	A	A1	B	B1	C	D	D1	E	E1	F	Inlet	Outlet
MSET100	37.5	46.4	29.4	31.5	61.2	79.0	81.0	32.0	35.9	77.3	1 ½	1
MSET150	37.5	46.4	29.4	31.5	61.2	83.0	86.2	32.0	36.8	84.2	1 ½	1 ½
MSET200	37.5	46.4	29.4	31.5	61.2	83.0	84.7	32.0	37.9	96.2	1 ½	1 ½

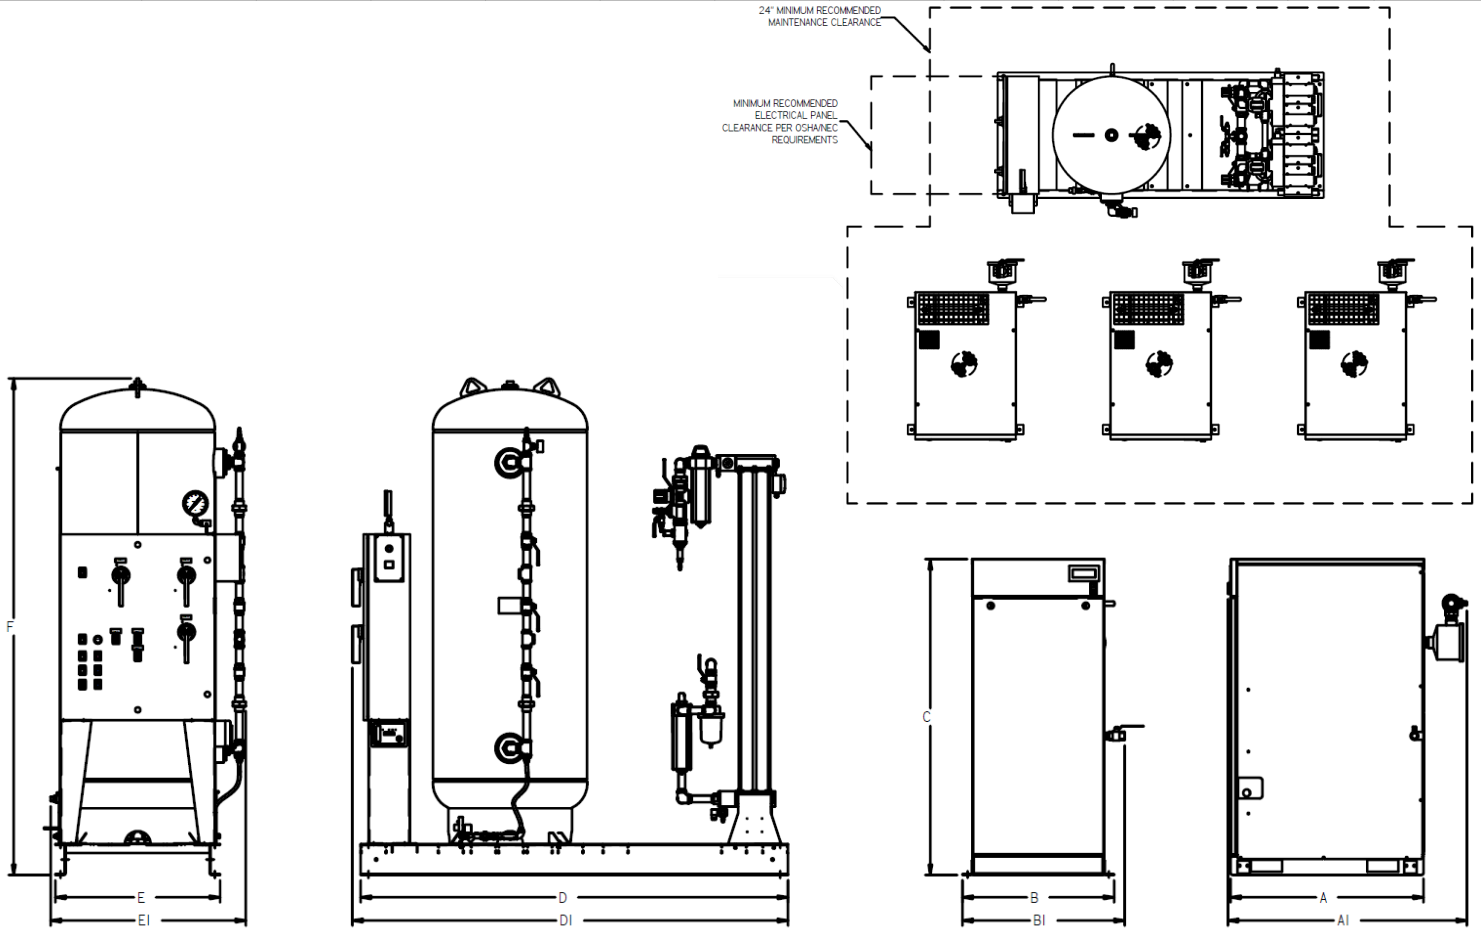

Medical Scroll Enclosure System Specifications

Model	HP <sup>(1)</sup>	SCFM @ 100 PSIG <sup>(3)</sup>	SCFM @ 50 PSIG <sup>(3)</sup>	Tank (gal)	BTU/Hr <sup>(2)</sup>	dB(A) Level <sup>(4)</sup>	System F.L.A.			Weight (lbs)
							208V	230V	460V	
MSET100	20	61	66.4	80	50,940	56	88.4	80	40.9	3550
MSET150	30	91.4	99.6	200	76,410	59	131.6	119	60.4	4750
MSET200	40	122	132.8	240	101,880	61	174.8	158	79.9	4800

Notes:

- 1 – HP is shown with one or more compressors in reserve per NFPA 99.
- 2 – BTU/Hr levels are shown with reserve compressor(s) on standby.
- 3 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing medical air systems
- 4 – dB(A) levels are shown with one compressor in reserve.
- 5 – Minimum recommended clearance 24" around system; follow OSHA/NEC requirements at control panel.
- 6 – 3 Year Limited Warranty.